

YASUKA[®]

Lighting Professionals



ABOUT US

Since its founding in 1990, Yasuka Corporation has been dedicated to innovation in Film and Studio production. Beginning with the pioneering DVR soft light, we progressed through CFL and HMI lighting, leading to today's LED lighting advancements. Known for our craftsmanship and commitment to performance, Yasuka sets trends and drives industry standards forward.

Our expertise spans a range of high-impact projects, from designing the camera rig for Aabra Ka Daabra (2004), India's first digitally shot 3D film, to providing specialized lighting for iconic sites like the Chhatrapati Shivaji Maharaj Vastu Sangrahalaya (formerly Prince of Wales Museum) in Mumbai and the National Salt Satyagraha Memorial in Navsari.

Today, Yasuka proudly represents top international brands like Lightstar, Nanlux, Dedolight, Menik, APARO, PDMovie, Meike and DigitalFoto. We offer tailored lighting solutions across the nation, meeting specialised needs in film production, television studios, stadiums, and architectural lighting—all with innovation at our core.

OUR CLIENTELE





SPECIFICATIONS

Model Evoke 5000B

Rated Power 200V-240V: 5000W

100V-125V: 5200W

Input Voltage/Current AC100V-240V/52A(Max) 50/60Hz

Beam Angle 95°

CCT 2700K-6500K (G/M±80)

CRI Average 97

TLCI Average 98

TM-30 Rf Average 96

TM-30 Rg Average 102

SSI (3200K) 85

SSI (5600K) 74

Dimming 0.0%-100.0%, by 0.1% increment

Light Only

Distance	5M	10M	15M	20M
2700K	5750 lux / 534 fc	1603 lux / 149 fc	588 lux / 55 fc	329 lux / 31 fc
3200K	6380 lux / 593 fc	1770 lux / 164 fc	646 lux / 60 fc	363 lux / 34 fc
4300K	7390 lux / 687 fc	2053 lux / 191 fc	749 lux / 70 fc	420 lux / 39 fc
5600K	7720 lux / 717 fc	2137 lux / 199 fc	778 lux / 72 fc	437 lux / 41 fc
6500K	7500 lux / 697 fc	2080 lux / 193 fc	751 lux / 70 fc	424 lux / 39 fc

With 30° Reflector

Distance	5M	10M	15M	20M
2700K	42000 lux / 3902 fc	10180 lux / 946 fc	4080 lux / 379 fc	2277 lux / 212 fc
3200K	47600 lux / 4422 fc	11200 lux / 1040 fc	4500 lux / 418 fc	2565 lux / 238 fc
4300K	55400 lux / 5147 fc	13100 lux / 1217 fc	5290 lux / 491 fc	2951 lux / 274 fc
5600K	57000 lux / 5295 fc	13880 lux / 1289 fc	5440 lux / 505 fc	3010 lux / 280 fc
6500K	54800 lux / 5091 fc	13100 lux / 1217 fc	5210 lux / 484 fc	2900 lux / 269 fc



Includes
200V-240V countries/regions:
Evoke 5000B
Yoke
AC Cable 2m
AC Aviation Plug
Reflector
USB Flash Drive
WC-EXT Wired Controller
AS-MB-1 Magnetic Base



SPECIFICATIONS

POWER	2400W
INPUT VOLTAGE	DC 48V/26A x2 Max, AC 100-240V 50/60Hz
CRI	CRI Average>96, TLCI Average>96
CCT	2700K-6500K
DIMMING	0-100% continuous, 0.1% increment
CONTROL	On-board, Remote, NANLINK APP, DMX/RDM, CRMX, Art-Net/sACN
DIMENSION	Light Fixture: 427.3 × 316.4 × 265.1mm / 16.8 × 12.5 × 10.4" Power Supply: 389.2 × 172.2 × 268.3mm/15.3 × 6.8 × 10.6 Light Fixture: 15kg / 33.1lb
WEIGHT	Yoke: 2kg / 4.4lb Power Supply: 11.58kg / 25.53lb RF-NLM-45-EV2400 Reflector: 2.12kg / 4.67lb DC Connection Cable 7.5M: 3.72kg / 8.20lb AC Power Cable 2.5M: 0.6kg / 1.32lb
CERTIFICATES	CE, UKCA, RoHS, IP55, PSE, FCC-ID, KCC, BIS, ETL, CETL

Photometrics

	CCT / Distance	3M	5M	7M	9M
Light Only	2700K	7910 lux / 735 fc	3162 lux / 294 fc	1686 lux / 157 fc	1054 lux / 98 fc
	3200K	8732 lux / 811 fc	3478 lux / 323 fc	1848 lux / 172 fc	1152 lux / 107 fc
	4300K	9671 lux / 898 fc	3858 lux / 358 fc	2071 lux / 192 fc	1263 lux / 117 fc
	5600K	9584 lux / 890 fc	3801 lux / 353 fc	2028 lux / 188 fc	1266 lux / 118 fc
	6500K	9745 lux / 905 fc	3873 lux / 360 fc	2099 lux / 195 fc	1275 lux / 118 fc
With 45° Reflector	2700K	32140 lux / 2986 fc	10770 lux / 1001 fc	5604 lux / 521 fc	3412 lux / 317 fc
	3200K	36710 lux / 3410 fc	12270 lux / 1140 fc	6381 lux / 593 fc	3872 lux / 360 fc
	4300K	41800 lux / 3883 fc	14030 lux / 1303 fc	7242 lux / 673 fc	4381 lux / 407 fc
	5600K	41910 lux / 3893 fc	14070 lux / 1307 fc	7254 lux / 674 fc	4401 lux / 409 fc
	6500K	36090 lux / 3353 fc	12160 lux / 1130 fc	6276 lux / 583 fc	3839 lux / 357 fc
With FL-28 17°	2700K	22370 lux / 2078 fc	7805 lux / 725 fc	3992 lux / 371 fc	2450 lux / 228 fc
	3200K	25090 lux / 2331 fc	8528 lux / 792 fc	4366 lux / 406 fc	2675 lux / 249 fc
	4300K	28170 lux / 2617 fc	9741 lux / 905 fc	4976 lux / 462 fc	3050 lux / 283 fc
	5600K	25610 lux / 2379 fc	8861 lux / 823 fc	4521 lux / 420 fc	2770 lux / 257 fc
	6500K	29320 lux / 2724 fc	10130 lux / 941 fc	5172 lux / 480 fc	3170 lux / 294 fc
With FL-28 43°	2700K	10200 lux / 948 fc	3913 lux / 364 fc	2103 lux / 195 fc	1317 lux / 122 fc
	3200K	11360 lux / 1055 fc	4347 lux / 404 fc	2334 lux / 217 fc	1438 lux / 134 fc
	4300K	12800 lux / 1189 fc	4894 lux / 455 fc	2629 lux / 244 fc	1640 lux / 152 fc
	5600K	11640 lux / 1081 fc	4450 lux / 413 fc	2389 lux / 222 fc	1486 lux / 138 fc
	6500K	13320 lux / 1237 fc	5092 lux / 473 fc	2733 lux / 254 fc	1702 lux / 158 fc



Flight Case Standard Kit (fixture only)
 Evoke 2400B × 1
 Yoke × 1
 Power Supply × 1
 USB Flash Drive × 1
 AS-CP-QR-EV Quick Release Clamp × 1
 CC-EV2400-FT-FO Flight Case × 1
 WS-RC-C2 Remote Controller × 1
 DC Connection Cable 7.5M × 1
 AC Power Cable 2.5M+1M (CN, UK, AU, EU, KR) × 1
 RF-NLM-45-EV2400 Reflector 45°x1 (packed separately)
 User Manual × 1



EVOKE 900C

POWER	940W
INPUT VOLTAGE	DC 48V/18.75A Max, AC 100-240V 50/60Hz
CRI	CRI Average>96, TLCI Average>96
CCT	1800K-10000K
DIMMING	0-100% continuous, 0.1% increment
CONTROL	On-board, Remote, NANLINK APP, DMX/RDM, CRMX, Art-Net/sACN
DIMENSION	Light Fixture (without COB protective cap): 330 x 241 x 210mm / 13.0 x 9.5 x 8.3" Power Supply: 146 x 125 x 344mm / 5.7 x 4.9 x 13.5"
WEIGHT	Light Fixture: 7.7kg / 16.98lb Yoke: 1.84kg / 4.06lb Power Supply: 4.5kg / 9.92lb RF-NLM-45 Reflector: 0.62kg / 1.37lb DC Connection Cable 7.5M: 2.62kg / 4.98lb AC Power Cable 6M: 0.88kg / 1.94lb
CERTIFICATES	CE, UKCA, RoHS, IP55, PSE, FCC-ID, KCC, BIS, ETL, CETL

EVOKE 1200B

POWER	1200W
INPUT VOLTAGE	DC 48V/18.75A Max, AC 100-240V 50/60Hz
CRI	CRI Average>96, TLCI Average>97
CCT	2700K-6500K
DIMMING	0-100% continuous, 0.1% increment
CONTROL	On-board, Remote, NANLINK APP, DMX/RDM, CRMX, Art-Net/sACN
DIMENSION	Light Fixture(without Yoke): 330 x 241 x 210mm / 12.99 x 9.48 x 8.26" Light Fixture(with Yoke): 503 x 370 x 210mm / 19.8 x 14.56 x 8.26" Power Supply: 376.5 x 181 x 246mm / 14.82 x 7.12 x 9.68"
WEIGHT	Light Fixture: 7.75kg / 17.09lb Yoke: 1.84kg / 4.06lb Power Supply: 10.5kg / 23.15lb
CERTIFICATES	CE, UKCA, RoHS, IP55, PSE, FCC-ID, KCC, BIS, ETL, CETL





EVOKE 600C

POWER	600W
INPUT VOLTAGE	DC 48V/12.5A Max, AC 100-240V 50/60Hz
CRI	CRI Average>96, TLCI Average>96
CCT	1800K-10000K
DIMMING	0-100% continuous, 0.1% increment
CONTROL	On-board, Remote, NANLINK APP, DMX/RDM, CRMX, Art-Net/sACN
DIMENSION	Light Fixture: 358.2×246.3×205.33mm/14.10×9.70×8.08"
WEIGHT	Light Fixture: 7.26kg/16.01lb Yoke: 1.02kg/2.25lb RF-BE-25 BE Mount Reflector 25°: 1.654kg/3.65lb
CERTIFICATES	CE, UKCA, RoHS, IP55, PSE, FCC-ID, KCC, BIS, ETL, CETL

EVOKE 150C

POWER	150W
INPUT VOLTAGE	AC100-240V/50-60Hz, 2A Max, DC14.4-28V, PD3.0 (12-28V) 60W Min
CRI	CRI Average>96, TLCI Average>97
CCT	1000K-20000K (G/M±200)
DIMMING	0-100% continuous, 0.1% increment
CONTROL	On-board, Remote, NANLINK APP, DMX/RDM, CRMX, Art-Net/sACN
DIMENSION	Light Fixture: 209.14×146.95×127.29mm/8.23×5.79×5.01" Yoke: 282.46×226.32×89.21mm/11.12×8.91×3.51" RF-FE-45 FE Mount Reflector 45°: Φ131.8×206×195.5mm/Φ5.19×8.11×7.70"
WEIGHT	Light Fixture: 2.11kg/4.65lb Yoke: 0.54kg/1.19lb RF-FE-45 FE Mount Reflector 45°: 0.34kg/0.75lb
CERTIFICATES	CE, UKCA, RoHS, IP55, PSE, FCC-ID, KCC, BIS, ETL, CETL





SPECIFICATIONS

	DYNO 650C	DYNO 1200C
POWER	Nominal 650W, Max 700W	Nominal 1200W, Max 1400W
INPUT VOLTAGE	DC48V/14.6A Max, AC 100-240V 50/60Hz	DC48V/14.6A Max, AC 100-240V 50/60Hz
CRI	CRI Average>95, TLCI Average>95	CRI Average>95, TLCI Average>95
CCT	2700K-20000K (G/M)	2700K-20000K (G/M)
DIMMING	0-100% continuous	0-100% continuous
CONTROL	On-board, 2.4G, Bluetooth, DMX, RDM, CRMX	On-board, 2.4G, Bluetooth, DMX, RDM, CRMX
DIMENSION	Light fixture: 33.74 x 6.81 x 24.80" Power adapter: 5.31 x 4.09 x 18.11"	Light fixture: 1023 x 173 x 918mm Power adapter: 191 x 134 x 460mm
WEIGHT	Light fixture: 15.8kg Power adapter: 4.2kg Diffuser: 1.8kg	Light fixture: 26.2kg Power adapter: 7.5kg Diffuser: 3kg

Photometrics

Model		Dyno 650C			
Distance		3M/9.84'	5M/16.4'	7M/22.96'	9M/29.52'
CCT Boost Mode	3200K	2403 lux 223 fc	979 lux 91 fc	546 lux 51 fc	339 lux 31 fc
	5600K	2649 lux 246 fc	1082 lux 101 fc	601 lux 56 fc	373 lux 35 fc
CCT Standard Mode	3200K	2080 lux 193 fc	850 lux 79 fc	474 lux 44 fc	293 lux 27 fc
	5600K	2237 lux 208 fc	919 lux 85 fc	512 lux 48 fc	318 lux 30 fc

Model		Dyno 1200C			
Distance		3M/9.84'	5M/16.4'	7M/22.96'	9M/29.52'
CCT Boost Mode	3200K	5083 lux 472 fc	2077 lux 193 fc	1145 lux 106 fc	720 lux 67 fc
	5600K	5596 lux 520 fc	2282 lux 212 fc	1247 lux 116 fc	779 lux 72 fc
CCT Standard Mode	3200K	4403 lux 409 fc	1804 lux 168 fc	975 lux 91 fc	613 lux 57 fc
	5600K	4718 lux 438 fc	1934 lux 180 fc	1048 lux 97 fc	658 lux 61 fc



HT-12C/ Air Pipe

Specifications

Output Wattage	12W	Color Temperature	2500-6500K
CRI	96	Dimming	0-100% Step-less dimming
Beam Angle	5600K:71°	Battery Capacity	7.4V/2600MAH
Operating Voltage	5-9V 2A	Compatibility	5-9V2A / Type-c USB
Dimensions	645x95x80mm	Weight	300g
Battery life	<80min (5500k/100%)	Control	Switch+key
LEDS & Power	32pcs x0.5W<White>/32pcs x0.5W<Yellow>/32pcs x0.5W<RGB>		
LUX	2500K: 510lux (0.5m) / 148lux (1m) / 39lux (2m) 5600K: 648lux (0.5m) / 186lux (1m) / 49lux (2m) 6500K: 663lux (0.5m) / 190lux (1m) / 50lux (2m)		

Specifications

Model No.	Meteor 60LS	Meteor 120LS
L EDS &Power	60Pcs(White) 60Pcs(Yellow) 60Pcs(RGB)	120Pcs(White) 120Pcs(Yellow) 120Pcs(RGB)
Output Wattage	18W	40W
DMX Pixel points	5/10/20/30/60	5/10/20/30/60/120
CRI	CRI 96	CRI 96
CCT	2000-20000K	2000-20000K
Control	1、Key 2、DMX/CRMX 3、APP(DeSal Lite+、Luminair)	1、Key 2、DMX/CRMX 3、APP(DeSal Lite+、Luminair)
Dimming	0-100% (0.5% per adjustment)	0-100% (0.5% per adjustment)
Battery Capacity	10.8V/37.7Wh	14.4V/92.2Wh
Operating Voltage	DC 16.8V 3A	DC 19.5V 4A
Compatibility	DMX 5Pin	DMX 5Pin
Battery life	120min(Normal) 160min(Economy) 210min(Super Economy)	120min(Normal) 160min(Economy) 210min(Super Economy)
Dimensions	612.5x48mm	1206x48mm
Weight	0.83kg	1.87kg
LUX(0.5/1m/2m)	2500K: 760lux / 225lux / 60lux 5600K: 1200lux / 361lux / 95lux 20000K: 914lux / 273lux / 74lux	2500K: 1040lux / 355lux / 116lux 5600K: 1620lux / 543lux / 181lux 20000K: 1270lux / 446lux / 141lux



Meteor Pixel



Tank 80B & Tank 80C

Tank 80B (80W / Bi-Color)

CCT: 2500-9999K
CRI: 96
LUX: 10800Lux(5600K/0.5m Bare lamp)
Control: Switch+knob+key, APP
Weight: 900g(Light)
Dimensions: 235x145x95mm

Tank 80C (80W / RGBWW)

CCT: 2500-9999K
CRI: CRI 96
LUX: 20400Lux(5600K/0.5m Bare lamp)
Control: Switch+knob+key, APP
Weight: 980g(Light)
Dimensions: 256x145x95mm

A1/ Pixel LED



Specifications

Output Wattage	7W	Color Temperature	2000-20000K
CRI	CRI 95	Dimming	0-100%(0.5% per adjustment)
Control	Switch+key, APP	Battery Capacity	7.4V/2050mA
Operating Voltage	5V2A-5V3A	Compatibility	Type-C, Wireless Charging
Dimensions	132x70x16mm	Weight	200g
Battery life	120min(Normal) 150min(Economy) 210min(Super Economy) 350min(Deep Economy)		
LEDS & Power	24Pcs(White) 24Pcs(Yellow) 24Pcs(RGB)		
LUX	2500K: 809lux (0.5m) / 151lux (1m) / 34lux (2m) 5600K: 1283lux (0.5m) / 239lux (1m) / 54lux (2m) 20000K: 1100lux (0.5m) / 204lux (1m) / 46lux (2m)		

RADI SERIES

APARO



Radi

180W Power / Dimensions
Φ250×1300mm

Radi-09Air (Bi-Color)

CCT: 2500-6500K

LUX: 8450Lux(5600K/0.5m)

Control: DMX/APP

Radi-09 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 7640Lux(5600K/0.5m)

Control: DMX/CRMX/APP

360W Power / Dimensions
Φ250×2500mm

Radi-09-2 Air (Bi-Color)

CCT: 2500-6500K

LUX: 6880Lux(5600K/0.5m)

Control: DMX/APP

Radi-09-2 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 6880Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

720W Power / Dimensions
Φ250×5000mm

Radi-09-4 Air (Bi-Color)

CCT: 2500-6500K

LUX: 8380Lux(5600K/0.5m)

Control: DMX/APP

100W Power / Dimensions
680×380×110mm

Radi-12 Air (Bi-Color)

CCT: 2500-6500K

LUX: 8160Lux(5600K/0.5m)

Control: DMX/APP

Radi-12 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 7240Lux(5600K/0.5m)

Control: DMX/CRMX/APP

200W Power / Dimensions
695×695×110mm

Radi-22 Air (Bi-Color)

CCT: 2500-6500K

LUX: 18500Lux(5600K/0.5m)

Control: DMX/APP

Radi-22 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 11300Lux(5600K/0.5m)

Control: DMX/CRMX/APP

360W Power / Dimensions
Φ500×1300mm

Radi-24-1 Air (Bi-Color)

CCT: 2500-6500K

LUX: 5440Lux(5600K/0.5m)

Control: DMX/APP

Radi-24-1 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 4080Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

680W Power / Dimensions
Φ500×2500mm

Radi-24-2 Air (Bi-Color)

CCT: 2500-6500K

LUX: 23700Lux(5600K/0.5m)

Control: DMX/APP

Radi-24-2 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 23700Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

360W Power / Dimensions
1240×625×200mm

Radi-24 Air (Bi-Color)

CCT: 2500-6500K

LUX: 20900Lux(5600K/0.5m)

Control: DMX/APP

Radi-24 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 16100Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

680W Power / Dimensions
1170×1160×200mm

Radi-44 Air (Bi-Color)

CCT: 2500-6500K

LUX: 33100Lux(5600K/0.5m)

Control: DMX/APP

Radi-44 Pro Air (RGBWW)

CCT: 2000-20000K

LUX: 21600Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

1200W Power / Dimensions
2400×1240×250mm

Radi-48 Air Ark (Bi-Color)

CCT: 2500-6500K

LUX: 31100Lux(5600K/0.5m)

Control: DMX/APP

Radi-48 Pro Air Ark (RGBWW)

CCT: 2000-20000K

LUX: 34400Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

2400W Power / Dimensions
2400×2400×240mm

Radi-88 Air Ark (Bi-Color)

CCT: 2500-6500K

LUX: 38100Lux(5600K/0.5m)

Control: Touch Screen/DMX/CRMX/APP

LIVE AIR 3 SMART



PDL – AFX - S

Motor Torque : 0.75 Nm
 Distance : MAX 100m
 Connection : Bluetooth 5.0
 Gear Module : Mod: 0.8/40 Mod : 0.6/ 60
 Mod : 0.5/72 Mod: 0.4/ 90
 Wheel : Dia 32mm * H 31mm
 Power Supply : LI – 42BX2 lithium Battery 600mAh
 Power Supply : LIR2477 Lithium battery 200mAh
 Work Time : 10 ~12 hour

Bluetooth Wireless Remote(PDL-TC-AFX)*1
 LIDAR Motor torque 0.75Nm(PD-BTMP-S)*1
 LIR2477 Battery (3.7V 200mAh)*2
 LI42Bx2 Battery(3.7V 600mAh 2.2Wh *2)*2
 Charging Cable(Micro usb)*2
 Charger Divided into four * 1
 Hot shoe clip*1
 Rod (L 5cm +10cm, DIA 15mm)*1
 Lens Gear ring *1
 Fixed fixture *1
 Assistive Focus Tile *1

PDL – AFX – RA – SP (HIGH TORQUE)

Motor Torque : 1.0 Nm
 Distance : MAX 100m
 Connection : Bluetooth 5.3
 Gear Module : Mod: 0.8/40 Mod : 0.6/ 60
 Mod : 0.5/72 Mod: 0.4/ 90
 Handle Size : L 36mm * W 120mm * H55mm
 Handwheel Size : Dia 77mm *H 44mm
 Power Supply : LI – 42BX2 lithium Battery 600mAh
 Power Supply : LIR2477 Lithium battery 200mAh
 Work Time : 10 ~12 hour

Bluetooth Wireless Remote(PDL-TC-AFX)*1
 Powerful LIDAR Motor torque 1.0 Nm(PD-BTMP- SP)*1
 LIR2477 Battery (3.7V 200mAh)*2
 LI42Bx2 Battery(3.7V 600mAh 2.2Wh *2)*2
 Charging Cable(Micro usb)*2
 Charger Divided into four * 1
 Hot shoe clip*1
 Rod (L 5cm +10cm, DIA 15mm)*1
 Lens Gear ring *2
 Fixed fixture *1
 REMOTE AIR RIG *1
 Assistive Focus Tile *1



DPB-70

DEDO



SPECIFICATIONS

Model: DPB70

Power consumption: 1200W

Light source: 1200W metal halide lamp with G22 socket, specially adapted for function within the DPB70 light fixture

Ambient Temperature: 35°C (95°F)

Protection Class: IP63

Overall outer dimensions: 92 x 100 x 62 cm

Weight: 49.8 kg (109.8 lb)

Also available in 2.5kW

Photometrics:

	Lux @ 5 m	Lux @ 10 m		Lux @ 20 m	
	Real	Real	Law	Real	Law
DPB70 (1.2K)	112.000	68.000	28.000	18.100	7.000
DPB70-2.5K	225.000	79.000	56.250	27.000	14.062

SPECIFICATIONS

Model: DLH402

Focus Angle: 50°- 4.5°

Focus Intensity: 1:20

Focus Scale: Indicates current angle of beam

Weight: 4400 g (9.7 lbs)

Lamp: DL400DHR-NB 400W daylight single ended, Hot Restrike

Cable: DPOW400DT, 7 m (23 ')

Mounting: 16mm (5/8") receptacle and 28mm (1 1/8") stud

Safety: Safety switch prevents operation when access door is open

UV: Extremely low UV emission



SPECIFICATIONS

Model: DLH4

Focus angle: 48°- 4.5°

Focus intensity: 1:25

Weight: 558 g (1.2 lbs) / 1020g

Max wattage: 100W (12V), 150W (24V)

Mounting: To any 16 mm (5/8 ") stud



It didn't take long for the revolutionary Series 400 to gain recognition among the professional community. In 2002, the dedolight design team was presented with the Cinec Award, and in 2003 awarded with both a Scientific and Engineering Award from the Oscar Committee of the Academy of Motion Picture Arts and Sciences and an esteemed Emmy Award from the Academy of Television Arts and Sciences.



SPECIFICATIONS

- #1: Referred to as a "hard" reflector, #1 redirects light with minimal diffusion and stray light, similar to a mirror but with a more homogenous beam. It's designed to redirect the light source without changing the beam size or character.
- #2: This reflector spreads the reflected light to approximately 12 degrees.
- #3: This reflector spreads the reflected light to approximately 50 degrees.
- #4: This reflector spreads the reflected light to approximately 95 degrees.
- #5: This reflector reshapes the beam into a narrow, elongated strip of light, ideal for lighting specific areas like staircases or doorways.

Sizes: 7x10cm, 25x25cm, 50x50cm, 100x100cm

LIGHTSTREAM LITE



A reflector system for the solo creator. Small and lightweight package, easy to use. Each reflector has 20 x 20 cm (approximately 8 x 8 inch), with plastic corner protection and cold shoe mount on rear.

EFLECT

DEDO



Effect + Reflection = EFLECT

Endless Multitude of Mirrors, small and large on bendable/shapable carrier material allows the creation of endless variety of amazing and surprising effects. Now also introducing additional surfaces called 'Tropical Blue' and 'Tropical Orange', which have seemingly magic effects which are not obvious when you are looking at the Effect reflector itself.

Introducing not only the mega-size additions to the range of sizes, from the smallest 7x10cm, now to the gigantic size 80x80cm, but also the new surfaces and color hues with 'Tropical Blue' and 'Tropical Orange', and the 'Zebra' variations.

DEDO NEO+



The dedolight|neo Intelligent LED Control Unit will drive all dedolight LED neo Systems from 20 to 90 Watt (Light Heads Series DLED2N to DLED9N) - Monocolor, Bicolor, Infrared & Ultraviolet.

- DMX always on-board with all DTneo ballasts
- Perfectly deep smooth linear or exponential dimming (user-selectable), with 8-bit (16-bit) advanced control via DMX/RDM protocol. Manual or DMX dimming range from ZERO light to FULL power light
- Wireless control via LumenRadio CRMX and Bluetooth (DTneo+ model only)
- Flicker free by DNA, optional scientific high-speed flicker free mode (user-selectable)
- Simple, intuitive menu via an OLED display

Together with the Institute of Legal Medicine at LMU Munich University the team of Dedo Weigert Film GmbH optimized their special range of equipment to the needs of crime investigation.

These dedolight Forensic Kits enable the specialist a more precise and faster forensic inspection of crime scenes, evidence and injured patterns.



FORENSIC KIT 10W

- focusing Bicolor 2700K- 6500 visible spectra light with flip-down polarizing filter, to reduce surface reflections in combination with a crossed polarizing filter on your camera
- focusing Bi-Infrared 860 nm/960 nm
- focusing Bi-Ultraviolet/violet 365 nm/400 nm - with flip-down short pass filter for 365 nm
- focusing Bi-Royal blue/light blue 450 nm/470 nm
- AC Powersupply
- DC Batteries
- clear UV-protection eyeglass
- yellow, orange and red filter eyeglasses to simulate the applicable camera filters to the investigators eyes.
- several mounting options: Hot-Shoe Cameramount, 1/4" cameramount, Handle, Table, Stand, Tripod

FORENSIC KIT 80W



- DLED7-BI dedolight focusable bicolor light, adjustable between 2700 and 6500K
- DLED7-BI-IR dedolight focusable IR-A LED light, adjustable between 860nm and 960nm wavelength
- DLED7-BI-UV dedolight focusable UV LED light, adjustable between 365nm and 400nm wavelength
- DLED7-BI-BB dedolight focusable royal blue / light blue LED light, adjustable between 450nm and 470nm wavelength
- DT7-BI-E Power supply for DLED7 bicolor LED light heads
- DLPV3 dedolight low pass UV filter for 365nm
- DST dedolight stands



Musée d'Orsay, Paris

Understanding the benefits offered by the dedolight system, museums and galleries had started adapting dedolight equipment for their own specialised uses. Dedo Weigert Film (DWF) identified this gap in their product range and modified their lights for dedicated applications in museum settings (DLAD classic).

dedolight architectural and display – DLAD
The design of this new series incorporates three dedicated optical functions in one look and gives the option of several light sources. A family of 14 – one look/appearance.

DLAD II has been designed with a very effective heat management/reduction system whilst at the same time minimising unwanted light spill.

The DLAD II family consist of three new lights:

- Spotlights Symmetric Focusing
- Spotlights Asymmetric Focusing
- Projection Light



me Collectors Room Berlin / Stiftung Olbricht, Berlin



UPGRADE PARTS

Customers advised us to design up and down adjustable yoke system so that when they take a reverse shot, the camera can take a lower scene. Now the updated version of carbon fiber just come out.



As pictures showing, loose yoke system tighten knob, adjust yoke system up and down, when it arrives lowest part, additional 27cm length will be added for reverse shot.



Counter weight	0.95kg*2pcs 0.5kg*2pcs
Monopod material	Carbon fiber
Monopod length range	45.8~81cm/18~31.8inch
Sled rod material	Carbon fiber
Sled rod diameter	15mm
Sled 2 rod center distance	60mm
THANOS-PROII weight bear	0~10.5kg
Arm weight bear	5kg~12.5kg
Whole weight	10.3kg
Gimbal compatibility	Any single handle Zhiyun Crane 3S, Crane 2S DJI Ronin S/Ronin SC/RS2/RSC2 Moza air 2 etc
V mount power system with LWS bracket	D-Tap to BMPCC cable DC cable for monitor NP-FW50 dummy battery to DC power cable LP-E6 dummy battery to DC power cable USB to DC cable



UPGRADE PARTS

Customers advised us to design up and down adjustable yoke system so that when they take a reverse shot, the camera can take a lower scene. Now the updated version of carbon fiber just come out



As pictures showing, loose yoke system tighten knob, adjust yoke system up and down, when it arrives lowest part, additional 27cm length will be added for reverse shot.



With updated yoke system monopod, you will save more time. No need to install yoke on collar.



V mount power system is included which can power your various equipment.



DC 55*25 elbow to 55*25 elbow 100cm



D-Tap to BMPCC 4K/6K Cable 100cm



DC 55*21 female to FW50 full decoding dummy battery 98.5cm



DC 55*21 female to E6 full decoding dummy battery 98cm



USB to DC 55*21 male 100cm



DC 55*25 elbow to 55*25 elbow 115cm



DC 55*21 elbow to 40*17 elbow 60cm



DC 55*21 straight to 55*21 elbow 60cm

DC size

5.5*2.1mm

Rod hole support diameter

Max 15mm

Net weight

300g

Size

18*9*2cm

Support camera (SONY)

A7, A7R, A7S, A7II, A7S2, A7M2, A7R2, A6500, A6300, A5100, A5000, A3000, NEX5, NEX7, DSC-RX10 etc

Support camera (Canon)

5D2, 5D3, 5D4, 6D, 6D2, 60D, 7D, 7D2, 70D, 80D, 5DSR etc

Support camera (BLACK MAGIC)

BMPCC-4K BMPCC-6K etc

Support battery

Any v mount battery

Operating ambient temperature

-20°C ~ 45°C

Counter weight

0.95kg*2pcs 0.5kg*2pcs

Monopod material

Carbon fiber

Monopod length range

45.8~81cm/18~31.8inch

Sled rod material

Carbon fiber

Sled rod diameter

15mm

Sled 2 rod center distance

60mm

THANOS-PROX weight bear

15kg Max

Arm weight bear

5~18kg

Whole system weight

14kg

Gimbal compatibility

Any single handle
Zhiyun Crane 3S, Crane 2S
DJI Ronin S/Ronin SC/RS2/RSC2
Moza air 2 etc

V mount power system with LWS bracket

D-Tap to BMPCC cable
DC cable for monitor
NP-FW50 dummy battery to DC power cable
LP-E6 dummy battery to DC power cable
USB to DC cable



LUXBEAM

LIGHTSTAR



red*dot* winner 2024



SPECIFICATIONS

Model:	LUXBEAM P12
Color temperature:	2700K-10000K
Dimming:	0-100%
Rated Input:	AC 100-120V
Connectivity:	DMX, WDMX/LumenRadio, and Bluetooth
Beam Angle:	9-45 degrees
Fixture Weight:	16.31lb / 7.4kg
Ballast Weight:	10.58lb / 4.8kg
Fixture Dimensions(without Yoke):	13.81x8.74x7.48 (inch) / 351x222x190 (mm)
Ballast Dimensions:	13.77x9.49x3.66 (inch) / 350x241x93 (mm)
IP class:	IP65

Also available in Bi-color.

MAGIC BOX 4S

LIGHTSTAR

IP65
Waterproof Rating



High illumination



Integrated power supply
without connecting cable,
ready to use when power on



Multiple combinations
Multiple lights can be easily combined
by accessories to create a matrix style
lighting effect



2700K-10000K
Continuous adjustable color
temperature.



Active cooling
Intelligent fan speed mode



Stackable storage
Easy to carry and install
saving storage space



**Also available Magic Box4 and
Magic Box 2S*

SPECIFICATIONS



Series No.	MAGIC BOX-4S	Color Temperature	2700K-10000K	Yoke Dimensions	780x528x55(mm)
Description	1200W Full Color LED Light	Color Rendition	CRI>95	Yoke weight	3kg
Input	100-240VAC 50/60Hz	Dimensions (Without Yoke)	681x620x119(mm)	Control	DMX/ CRMX/ BLUETOOTH
IP Class	IP65	Lamphead weight	23kg		

MAGIC BOX-4S Illuminance (Lux)

	Distance	3m		5m		7m		9m	
	Color temperature	3200K	5600K	3200K	5600K	3200K	5600K	3200K	5600K
SPOT	Illuminance	33200	34722	12000	12500	6122	6378	3703	3858
Beam Angle 48°	Beam Diameter	3.06m	3.06m	4.95m	4.95m	6.73m	6.73m	8.51m	8.51m



SPECIFICATIONS

LMSA – P1000 1000W

Rated Input : AC 100-240V

Output Power : 1000W

Color Temperature : 2400 ~ 10000°K

Dimensions : $\phi 1800 \times 1300$ (mm)

Lamphead Weight : 8kg

Ballast Weight : 3.5kg

IP class : IP 20

Packing Size : 945x910x216mm

Accessories : Black / Silver Skirt,
Black / Black Skirt,
Travel case

SPECIFICATIONS

LMSA – P1000T 1000W

Rated Input : AC 100-240V

Output Power : 1000 W

Color Temperature : 2400-10000°K

Dimensions : $\phi 900 \times 2400$ (mm)

Lamphead Weight : 11 kg

Ballast Weight : 3.5 kg

IP class : IP 20

Packing Size : 1400 x 600 x 380 (mm)

Accessories : Black / Silver Skirt , Black / Black Skirt , Travel case



LUXED

LIGHTSTAR




LUXED-P2 320W



LUXED-PS 160W



LUXED-P3 480W

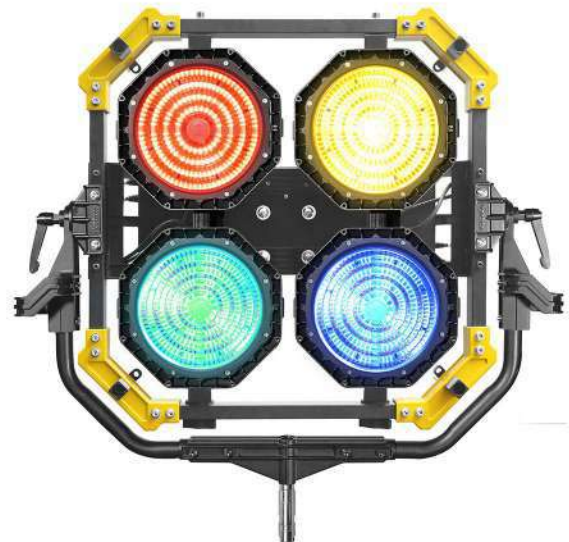

LUXED-P4 6400W

SPECIFICATIONS

Rated Input	100-240V ,50/60Hz
White Light	2400°K-10000°K
Colored Light	RGBWW+Color Gamut with Hue & Saturation Control
Green-Magenta Adjustment	Continuously Adjustable (full $\pm$ Green)
Color Rendition	CRI $\geq$ 95 TLCI $>$ 90 R9 $\geq$ 90 (3200/5600)
Control	Cable DMX, CRMX, Lumenradio, Bluetooth
IP Class	IP20
Compliance	CE , ROHS
Accessories	Soft Box ,Grid ,Black/ White Skirt, Flightcase, AIR diffusion box

LUXED


LIGHTSTAR



LUXED-P12 1920W



LUXED-P9 1440W

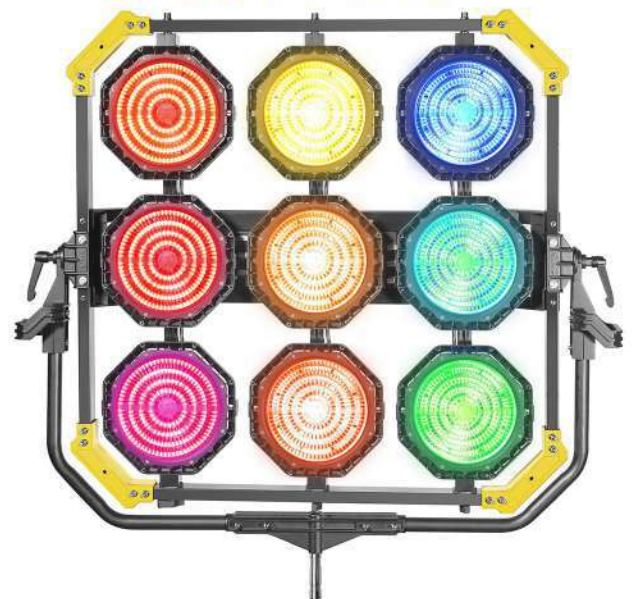

SPECIFICATIONS

Rated Input	100-240V ,50/60Hz
White Light	2400°K-10000°K
Colored Light	RGBWW+Color Gamut with Hue & Saturation Control
Green-Magenta Adjustment	Continuously Adjustable (full $\pm$ Green)
Color Rendition	CRI $\geq$ 95 TLCI $>$ 90 R9 $\geq$ 90 (3200/5600)
Control	Cable DMX, CRMX, Lumenradio, Bluetooth
IP Class	IP20
Compliance	CE , ROHS
Accessories	Soft Box ,Grid ,Black/ White Skirt, Flightcase, AIR diffusion box

FF PRIME CINE LENS

MEIKE



8K and clean and sharp image quality, suitable for a wide range of camera and scenes
 T2.1 to value aperture, high light transmittance and large-diameter
 Nano-wide angle and multi-layer coating to suppress ghosting and glare
 APO-level chromatic aberration control
 Suppresses the breathing effect during focusing to achieve a stable image
 Near-zero distortion control to prevent picture distortion and halo
 11-blade aperture can shoot near-circular natural and soft blur images and diffuse starburst
 Full metal body

Focal Length	16mm	24mm	35mm	50mm	85mm	105mm	135mm
Max Aperture	T2.5	T2.1	T2.1	T2.1	T2.1	T2.1	T2.4
Diaphragm Blades	10	11	11	11	11	11	17
Minimum Focusing Distance	0.25m	0.3m	0.33m	0.6m	0.85m	1m	1m
Lens Structure	11 Groups 16 Elements	9 Groups 14 Elements	9 Groups 14 Elements	8 Groups 12 Elements	8 Groups 14 Elements	7 Groups 11 Elements	8 Groups 12 Elements
Full Frame Angle of View	Diagonal 107.3°	Diagonal 83.4°	Diagonal 63.5°	Diagonal 46.4°	Diagonal 29.5°	Diagonal 23.6°	Diagonal 18.5°
APS-C Angle of View	Diagonal 81.5°	Diagonal 60.1°	Diagonal 43.2°	Diagonal 29.6°	Diagonal 19.2°	Diagonal 15.6°	Diagonal 12.1°
Mounts	PL (mount) / EF (mount) / RF (mount) / E (mount) / L (mount)						

S35 PRIME CINE LENS

MEIKE



Focal Length	12mm	18mm	25mm	35mm	50mm	75mm	100mm
Max Aperture	T2.5	T2.1	T2.1	T2.1	T2.1	T2.1	T2.1
Diaphragm Blades	10	10	10	11	11	13	12
Minimum Focusing Distance	0.2m	0.25m	0.35m	0.48m	0.6m	0.7m	0.9m
Lens Structure	10 Groups 17 Elements	10 Groups 15 Elements	10 Groups 13 Elements	10 Groups 12 Elements	9 Groups 12 Elements	11 Groups 13 Elements	7 Groups 13 Elements
S35 Angle of View	Diagonal 104.5°	Diagonal 76.6°	Diagonal 64.2°	Diagonal 48.2°	Diagonal 31.7°	Diagonal 23.9°	Diagonal 15.3°
PL (mount)	✓	✓	✓	✓	✓	✓	✓
EF (mount)	✓	✓	✓	✓	✓	✓	✓

PL LENS MOUNT ADAPTER



Model Number	Compatible Lens	Compatible Camera
MK-PLTE	PL-Mount Cine Lens	Sony E-Mount camera
MK-PLTRF	PL-Mount Cine Lens	Canon RF-Mount camera
MK-PLTL	PL-Mount Cine Lens	Panasonic/Leica/Sigma L-Mount camera

SPECIFICATIONS

Standard Li-ion Battery

Built-in LCD energy status display

The maximum discharge current is 3C

Application: Film cameras, Professional lighting

Battery customisation available.



Battery Charger

Constant Amp & Volt

12V-16.8V, 8A

22V-29.6V, 6A

42V-54.6V, 12A



Power Stak 6015

Energy: 14.8V-40Ah

Size: 225x140x190mm

Weight: 4.2kgs

Power Stak 6030

Energy: 29.6V-20Ah

Size: 225x140x190mm

Weight: 4.3kgs

Power Stak LF

Energy: 1000-40Ah

Size: 225x140x220mm

Weight: 6.25kgs

Power Stak 1200

Energy: 48V-28Ah

Size: 225x140x360mm

Weight: 11.6kgs

V-MOUNT BATTERY



Specifications:

Power Stak 240 (V-Mount)

Voltage: 14.8V DC

Ampere: 16A-Hour

Dimension: 152x97x70mm

Weight: 1140gms

Built-in D-Tap &

LED Charge Indicator



Battery Charger V-Mount

Input: 100 - 240 AC 47 - 63Hz

Output: 16.8V / 2A

DC Output: 16.4V / 5A

Consumption: 100W

Dimension (mm): 210x150x70

DVR100



LINE: 12V/24V
POWER IN: BATTERY/
ADAPTER
LAMP: 12V,100W/24V
250W/150W
BASE: GX6.35

Reflecting Dome



Size

90 cm
120 cm
150 cm
190 cm

DVR 1000 with remote



LINE: 5A-220V AC
DIMMER: 80%
WATT: 1000
LAMP: 64575
BASE: GX6.35

Focusing Soft Light



Rated Voltage: 220V/50Hz
Color Emerging: Ra>90
Color Temperature: 3200°K

Model	Power Rated	Weight
FD-R150/300/650	150~650W	2kg
FD-R800	800W	3.1kg
FD-R2000	2000W	4.6kg

DVR 2000 with remote



LINE: 10A-220V AC
DIMMER: 80%
WATT: 2000
LAMP: 2 x 64575
BASE: GX6.35

Cine Ball



SIZE
24"
34"
34"

POWER
1000W Halogen
2000W Halogen
575/1.2K HMI

DVR 4000 with remote



LINE: 20A-220V AC
DIMMER: 80%
WATT: 4000
LAMP: 4 x 64575
BASE: GX6.35


Soft Box



Size

1.5' x 1.5'
2' x 2.5'
2.5' x 3'
3' x 4'
4' x 6'
6' x 6'

Grid

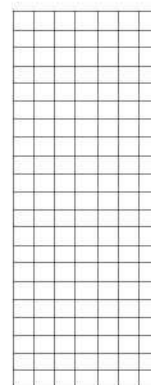

ARCHITECTURAL & STADIUM LIGHT

Designed to replace traditional brand lamps

Can replace 1000W traditional lamps

• 10-year service life • 5-year brightness guarantee • Comes with sight, easy to install

Can replace
the following
traditional brand
lamps

~~GE~~ EF-2000

MVF406/1800W

HNF003

MVF401

MVF403

MVF024

~~Panasonic~~ YOA56305
YOA56400


~~PHILIPS~~



NANO STAND



HIGH SUPER STAND

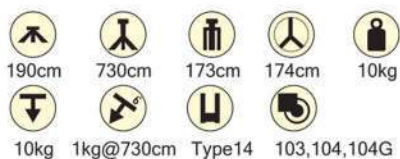

MINI STACKER STAND



20"MINI BASE CENTURY STAND




WIND-UP STAND




STRATO SAFE 5-SECTION CRANK STAND - 20'9"



MODEL NO	HEIGHT
B100	345 cm
B105	175 cm
B120	222 cm
B130	338 cm
B140 XL	427 cm
B150	610cm

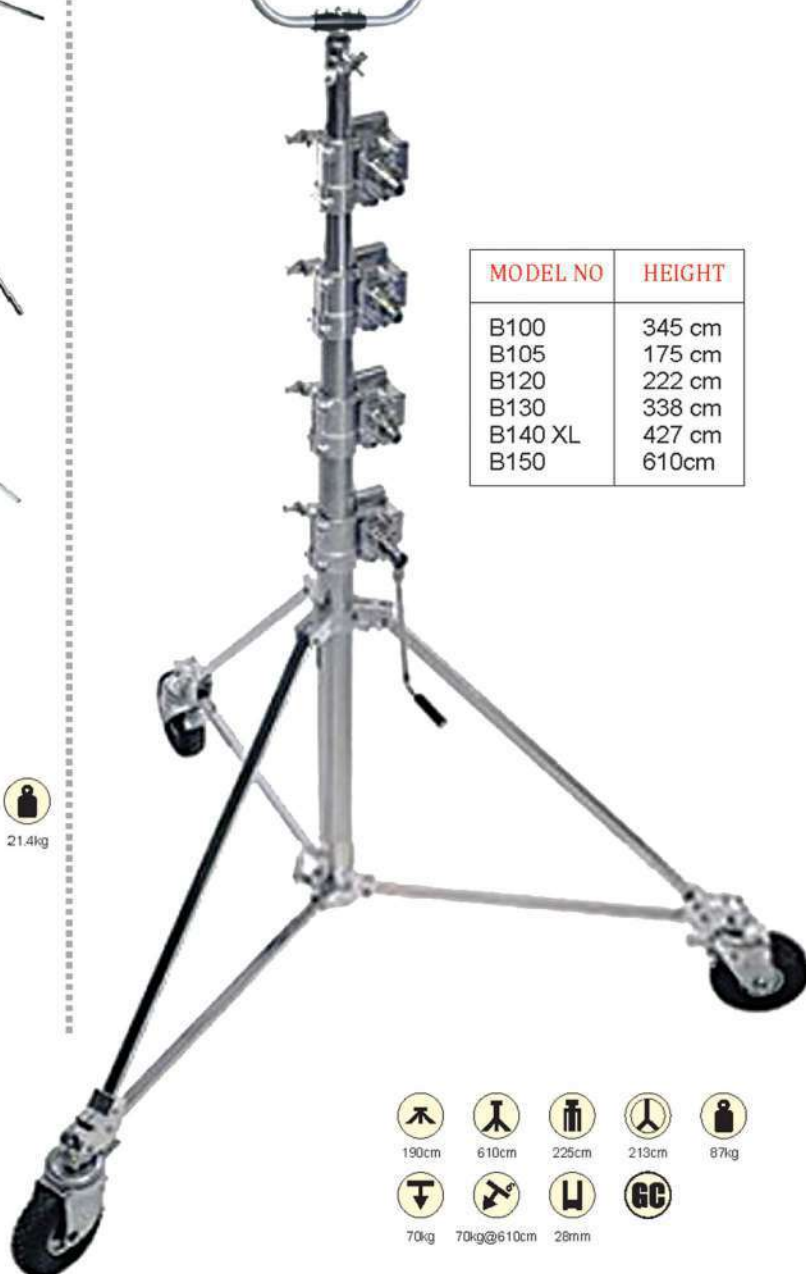

TOP SYSTEM 54 FF3054

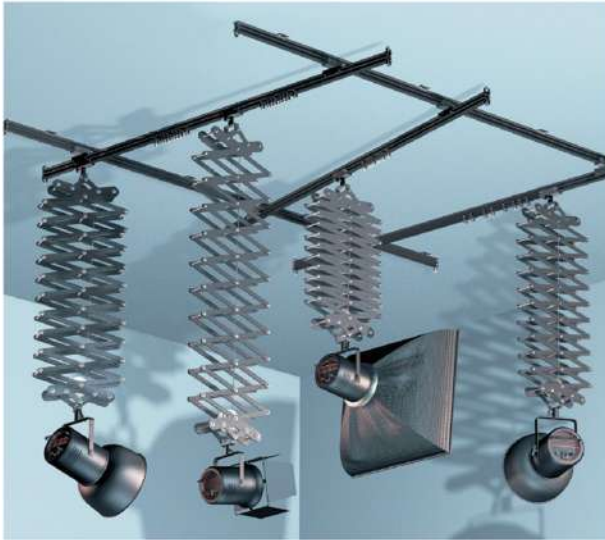

CAMERA SUPPORTS

HIGHLY STABLE STUDIO
CAMERA FLOOR STAND
FOR STILL VIDEO
CINE & DIGITAL CAMERA

HEIGHT : STANDARD 2 M./2.6M.
BALANCE : COUNTER WEIGHT
MOVEMENT : VERTICAL & HORIZONTAL
WITH 24 BALL BEARING
ROTATION : 360 DEGREE
CARRYING WT : 10 kg MAX
WEIGHT : 88 kg APPROX



CONTROL BOX-110V 851



BACKGROUND ROLL SUPPORTING SPIGOT 850



SWIVELLING "C" CLAMP C150



MP EYE COUPLER WITH 28MM SPIGOT C4461



FLEX ARM HEAVY DUTY 237HD



GRAB CLAMP C339



VARIABLE FRICTION ARM 244N



GRIP HEAD W/SWIVEL PIN D240®



SUPER CLAMP 035



MEDIUM HYDROSTATIC ARM 823



PUMP CUP WITH 16MM BABY SWIVEL SPIGOT F1000



DOUBLE ARTICULATED ARM 396B-3



LP SWIVEL EYE COUPLER C482



21/2" GRIP HEAD D100 ®



YASUKA[®]

Lighting Professionals

Contact Us

Head Office: 90, New Unique Industrial Estate, Dr R.P. Road,
Mulund West, Mumbai - 400 080, INDIA

Sales Office: 90/716, Road No 2, Dr D B More Marg, Motilal Nagar 1,
Mumbai – 400 104, INDIA

Phone: +91 9819 147 435 Email: info@yasuka.in Web: www.yasuka.in

